


MQG-Y007240

棱晶遮光板, 透光率70-73%, 全方位反射, 配光均匀, 无眩光
prismatic diffuser with 70-73% optical efficiency

产品规格描述: SPECIFICATIONS

型号 model	规格 spec	A (mm)	B (mm)	包装尺寸 packing(cm)	包装数量 (set/ctn)
MQG-Y007440	4x40W	1198	598	125x63x19	2
MQG-Y007340	3x40W	1198	598	125x63x19	2
MQG-Y007240	2x40W	1198	298	125x33x19	2
MQG-Y007140	1x40W	1198	183	125x21.5x19.5	2
MQG-Y007430	4x30W	893	598	95x63x19	2
MQG-Y007330	3x30W	893	598	95x63x19	2
MQG-Y007230	2x30W	893	298	95x33x19	2
MQG-Y007130	1x30W	893	183	95x21.5x19.5	2
MQG-Y007420	4x20W	598	598	65x63x19	2
MQG-Y007320	3x20W	598	598	65x63x19	2
MQG-Y007220	2x20W	598	298	65x33x19	2
MQG-Y007120	1x20W	598	183	65x21.5x19.5	2
MQG-Y007213	2x13W	300	300	65x33.5x20	4
MQG-Y007122	1x22W	300	300	65x33.5x20	4

灯体材质: 0.6mm冷轧钢板/散光器采用棱晶板/T8直管嵌入安装
Material: 0.6mm steel housing for T8, prismatic diffuser

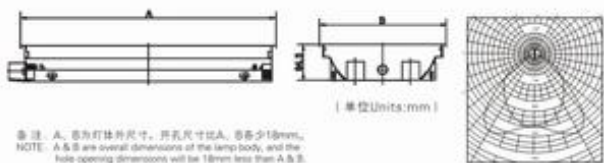

T8棱晶板柔光灯盘

T8 luminaire with opal or prismatic diffuser

棱晶遮光板, 透光率70-73%
(备注:灯框加密封条可达IP54)
prismatic diffuser with 70-73% optical efficiency
(remark: IP54 with gasket is available on request)





MQT-Y00108226



MQT-Y00105213



MQT-Y00104110



MQT-Y00106218





MQT-Y00105113

D1筒灯

D1 downlight

灯体材质：灯圈采用优质钢板/灯体采用进口电解板反射器采用台湾高纯铝杯/中间加防雾玻璃/灯管
装入方式为：横插/嵌入式安装

Material: Galvanized steel body and steel ring, anodized aluminium reflector, tempered glass

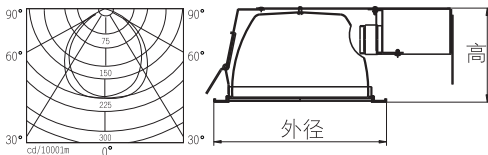

产品规格描述：SPECIFICATIONS

型号 model	规格 spec	开孔尺寸 cut-out(mm)	外径 lamp diameter(mm)	高度 height (mm)	包装尺寸 packing(cm)	包装数量 (set/ctn)
MQT-Y00104110	1x10W	130	150	95	64x35x49	24
MQT-Y00104140	1x40W(E27)	130	150	95	64x35x49	24
MQT-Y00105113	1x13W	155	180	115	69x43x34	12
MQT-Y00105140	1x40W(E27)	155	180	115	69x43x34	12
MQT-Y00106113	1x13W	165	180	115	69x43x34	12
MQT-Y00106118	1x18W	165	193	115	69x43x34	12
MQT-Y00106140	1x40W(E27)	165	193	115	69x43x34	12
MQT-Y00106213	2x13W	165	193	115	69x43x34	12
MQT-Y00106218	2x18W	165	193	115	69x43x34	12
MQT-Y00108213	2x13W	205	235	130	69x49.5x29	8
MQT-Y00108218	2x18W	205	235	130	69x49.5x29	8
MQT-Y00108226	2x26W	205	235	130	69x49.5x29	8